




China 608zz Bearing Supplier

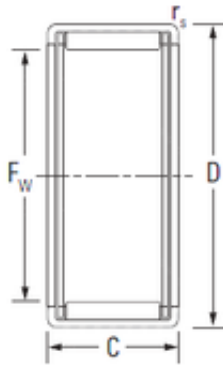

HK0910 Bearing 2D drawings and 3D CAD models

SKF NTN Snr Koyo NSK Timken HK0910
 HK0912 HK1010 HK1012 HK1015 HK1210
 HK1212 HK08*14*10 HK08*14*12 HK10*16*10
 HK10*16*12 HK10*16*15 HK1212 Needle Roller
 Bearing

Bearing No. HK0910

| | |
|-------------------------------|---|
| Size | 9x13x10 mm |
| Bore Diameter | 9 mm |
| Outer Diameter | 13 mm |
| Width | 10 mm |
| Fw | 9 mm |
| D | 13 mm |
| C | 10 mm |
| r5 min. | 0.40 mm |
| Weight | 0.004 Kg |
| Basic dynamic load rating (C) | 4.57 kN |
| Basic static load rating (C0) | 5.07 kN |
| (Grease) Lubrication Speed | 19000 r/min |
| Category | Needle Non Thrust Roller Bearings |
| Inventory | 0.0 |
| Manufacturer Name | KOYO |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0.005 |
| EAN | 0060579019081 |
| Product Group | B04144 |
| Rolling Element | Needle Roller Bearing |
| Component | Roller Assembly with Outer Ring - No Inner Ring |



China 608zz Bearing Supplier

| | |
|---------------------------|--|
| Enclosure | Open |
| Self Aligning | No |
| Retainer | Yes |
| Number of Rows of Rollers | Single Row |
| Separable | No |
| Closed End | No |
| Inch - Metric | Metric |
| Relubricatable | No |
| Thrust Bearing | No |
| Long Description | 9MM Bore; 13MM Outside Diameter; 10MM Width; Needle Roller Bearing; Roller Assembly with Outer Ring - No Inner Ring; Open Enclosure; No Self Aligning; Retainer; Single Row of Rollers; No Separable; No |
| Other Features | 2 Rib Outer Ring Drawn Cup Bearing Steel Cage |
| Category | Needle Non Thrust Roller Bearing |
| UNSPSC | 31171512 |
| Harmonized Tariff Code | 8482.40.00.00 |
| Noun | Bearing |
| Keyword String | Needle |
| Manufacturer URL | http://www.koyousa.com |
| Manufacturer Item Number | HK0910 |
| Weight / LBS | 0.009 |
| Outside Diameter | 0.512 Inch 13 Millimeter |
| Width | 0.394 Inch 10 Millimeter |
| Bore | 0.354 Inch 9 Millimeter |
| Bearing No. | HK0910 |
| C3(min) | \ |
| rs(min) | 0.40 |
| Cr | 4.57 |



China 608zz Bearing Supplier

| | |
|---------------------|----------|
| C0r | 5.07 |
| Cu | 0.770 |
| Grease lub. | 19000 |
| Oil lub. | 30000 |
| (Refer.) Mass(kg) | 0.004 |
| Mounting inner ring | JR6x9x12 |